:S-PN-EM3/OL/B:

Pantheon ST EM Surface Dlight


IK08 IP65 130 140




5Y

Technical Summary	
CCT (K)	**6500K**
Product Name	**Pantheon ST EM Surface Dlight Open Lens 6500K IP65 - Black**
Wattage (W)	**2.5W**
Output (lm)	**250**
CRI	**60**
Beam Angle	**140°**
Colour / Finish	**Black**
IP Rating	**IP65**
IK Rating	**IK08**

GALLERY

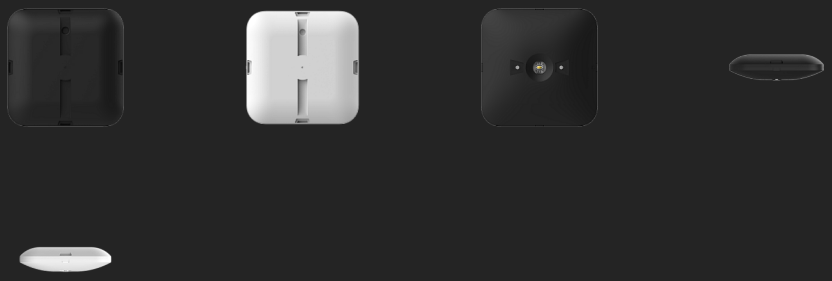


LINE DRAWING



A: 160mm
B: 160mm
C: 43mm

LDC

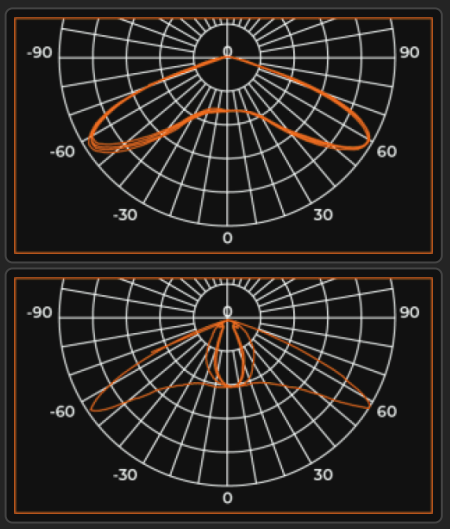

FEATURES AND BENEFITS

- Stylish low profile surface emergency downlight
- IP65 rating for all interior and exterior emergency requirements
- Dedicated designs for open areas and corridor applications
- Self Test Emergency as standard with integral switch for manual test requirements.
- Non-maintained emergency operation - 3hrs Non-Maintained Emergency output