
# :S-SA-300/40/GR:

*Sable Asy FloodLight*





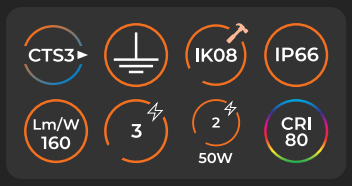

Spectre LIGHTING

5Y

| Technical Summary | |
|---|---|
| CCT (K) | **4000K** |
| Product Name | **Sable Asy FloodLight 300W 4000K IP66 - Grey** |
| Wattage (W) | **150W / 225W / 300W** |
| Output (lm) | **27,450 / 51,000** |
| Lm/W | **160** |
| CRI | **80** |
| Beam Angle | **110x40° Asy50°** |
| Colour / Finish | **Grey** |
| IP Rating | **IP66** |
| IK Rating | **IK08** |

## GALLERY






## FEATURES AND BENEFITS

- Robust stylish commercial IP66 floodlight
- High Efficiency exceeding 160Lm/W
- Die-Cast aluminium for high performance thermals and reliability
- Asymmetrical distribution preventing unwanted light spillage
- Multi output / power options with 2 options per size (2 power options for 50W)
- Supplied c/w integral photocell option

## ACCESSORIES

- Sable Flood Clamp Bracket
- Neddik / Sable Flood Pole Mounting Adaptor
- Sable Flood Outreach Arm

## LINE DRAWING




## LDC

