# :S-LL-6/CTS/EM3:

*LineaLux Batten*

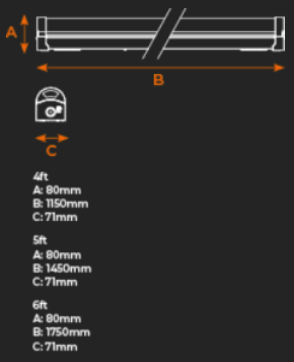




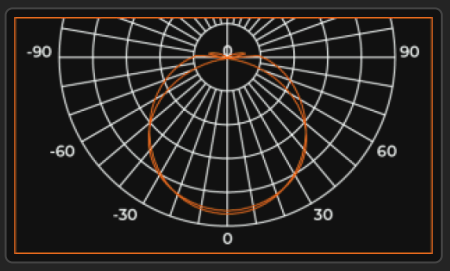

5Y

| Technical Summary | |
|---|---|
| CCT (K) | **3000K/4000K/6000K** |
| Product Name | **LineaLux Batten 6ft CTS Emergency IP20 - White** |
| Wattage (W) | **35W/50W** |
| Output (lm) | **4,900 / 7,000** |
| Lm/W | **140** |
| Colour Temp Selectable (CTS) | **Yes** |
| CTS Number | **3** |
| CRI | **80** |
| Beam Angle | **120°** |
| Colour / Finish | **White** |
| IP Rating | **IP20** |
| IK Rating | **IK08** |
| Cut Out (mm) | **1641** |

## LINE DRAWING




## LDC




## GALLERY



## FEATURES AND BENEFITS

- High efficiency linear batten exceeding 140Lm/W
- Design elements to facilitate ultra-fast installation with modular attchments for Microwave and Emergency conversions
- Power / output selectable and CCT adjustable.
- Hinged gear tray assembly to allow easy access / installation
- Dimmable an Emergency options available upon request

## ACCESSORIES

- Module EM Emergency Module
- Module MS MWS Module