
:S-IB-5/CTS/GR:

iLineBar






5Y

Technical Summary	
Product Name	**iLineBar Linear 5ft CTS IP20 - Grey**
Wattage (W)	**19W/28W/32W/38W**
Output (lm)	**2,570 / 3,850 / 4,350 / 5,000**
Lm/W	**140**
CCT (K)	**3000K/4000K**
Colour Temp Selectable (CTS)	**Yes**
CTS Number	**2**
CRI	**80**
Beam Angle	**105°**
Colour / Finish	**Grey**
IP Rating	**IP20**
IK Rating	**IK02**
Compatible Range 2	**132**
Compatible Range 3	**138**


LINE DRAWING

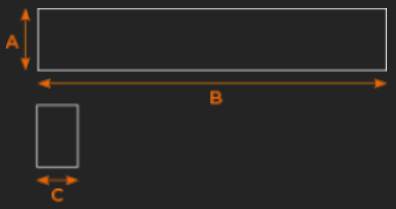


4ft
A: 76mm
B: 1205mm
C: 57mm

5ft
A: 76mm
B: 1505mm
C: 57mm

LDC

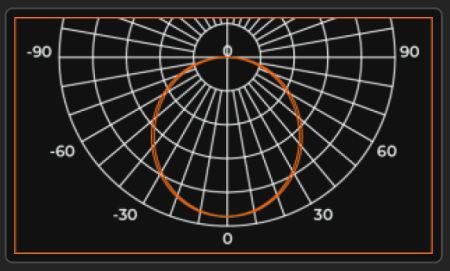

GALLERY

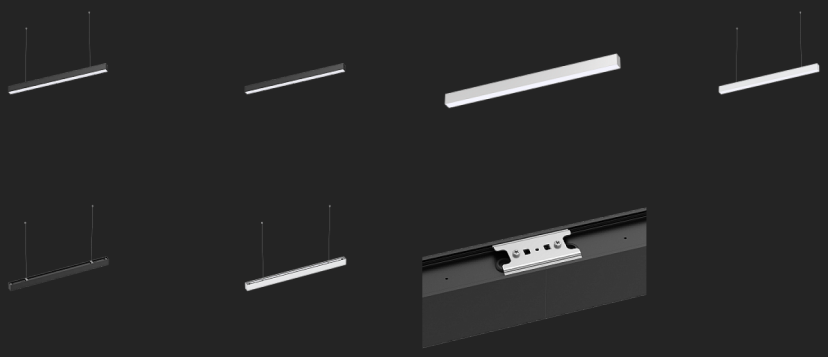

FEATURES AND BENEFITS

- Aluminium commercial linear light bar boasting an efficiency exceeding 140Lm/W
- Singular or continous operation with multipe installation options
- Power / output selectable and CCT adjustable.
- UGR

ACCESSORIES

- iLineBar Suspension Kit
- iLineBar T Connector
- iLineBar L Connector
- iLineBar X Connector
- iLineBar 120 degree Connector