
# :S-RF-5/CTS/W:

*RadiForm*



5Y

| Technical Summary | |
|---|---|
| CCT (K) | **3000K/4000K/6500K** |
| Product Name | **RadiForm Linear UGR CTS 5ft IP44 - White** |
| Wattage (W) | **24W/29W/33W/38W** |
| Output (lm) | **2,700 / 3,300 / 3,800 / 4,400** |
| Lm/W | **120** |
| Colour Temp Selectable (CTS) | **Yes** |
| CTS Number | **3** |
| CRI | **80** |
| Beam Angle | **90°** |
| UGR | **<19** |
| Colour / Finish | **White** |
| IP Rating | **IP44** |
| IK Rating | **IK06** |

## GALLERY




## LINE DRAWING




4ft
A: 165mm
B: 1200mm
C: 50mm

5ft
A: 165mm
B: 1500mm
C: 50mm

## LDC

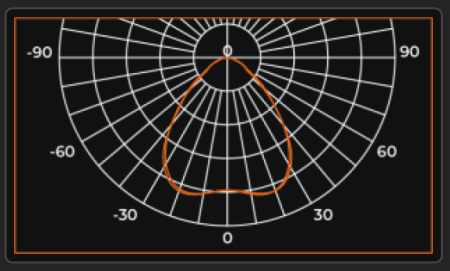


## FEATURES AND BENEFITS

- Contemporary UGR<19 commercial linear.
- High Efficiency exceeding 120Lm/W.
- Design elements to facilitate ultra-fast installation with modular attachments for Microwave and Emergency conversions.
- Multi CCT Selectable from 3,000K, 4,000K, and 6,500K.
- Multi output / power options with 4 options.
- Dimmable and Emergency options available