:S-LL-4/CTS/EM3/MS:

LineaLux Batten





5Y

Technical Summary	
CCT (K)	**3000K/4000K/6000K**
Product Name	**LineaLux Batten 4ft CTS Emergency MWS IP20 - White**
Wattage (W)	**19W/38W**
Output (lm)	**2,660 / 5,320**
Lm/W	**140**
Colour Temp Selectable (CTS)	**Yes**
CTS Number	**3**
CRI	**80**
Beam Angle	**120°**
Colour / Finish	**White**
IP Rating	**IP20**
IK Rating	**IK08**
Cut Out (mm)	**1041**

GALLERY




FEATURES AND BENEFITS

- High efficiency linear batten exceeding 140Lm/W
- Design elements to facilitate ultra-fast installation with modular attchments for Microwave and Emergency conversions
- Power / output selectable and CCT adjustable.
- Hinged gear tray assembly to allow easy access / installation
- Dimmable an Emergency options available upon request

ACCESSORIES

- Module EM Emergency Module
- Module MS MWS Module

LINE DRAWING

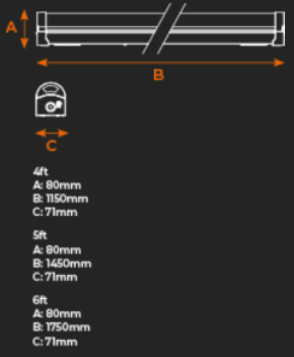

LDC

