
# :S-GL-2W/EM3/CL/W:

*Gallant ST EM*


IK08 IP40 50 130




5Y

| Technical Summary | |
|---|---|
| Product Name | **Gallant ST EM 2W DLight Corridor Lens 6500K IP40 - White** |
| Wattage (W) | **2W** |
| Output (lm) | **130** |
| CCT (K) | **6500K** |
| CRI | **60** |
| Beam Angle | **50°x140** |
| Colour / Finish | **White** |
| IP Rating | **IP40** |
| IK Rating | **IK08** |
| Cut Out (mm) | **60** |

## GALLERY

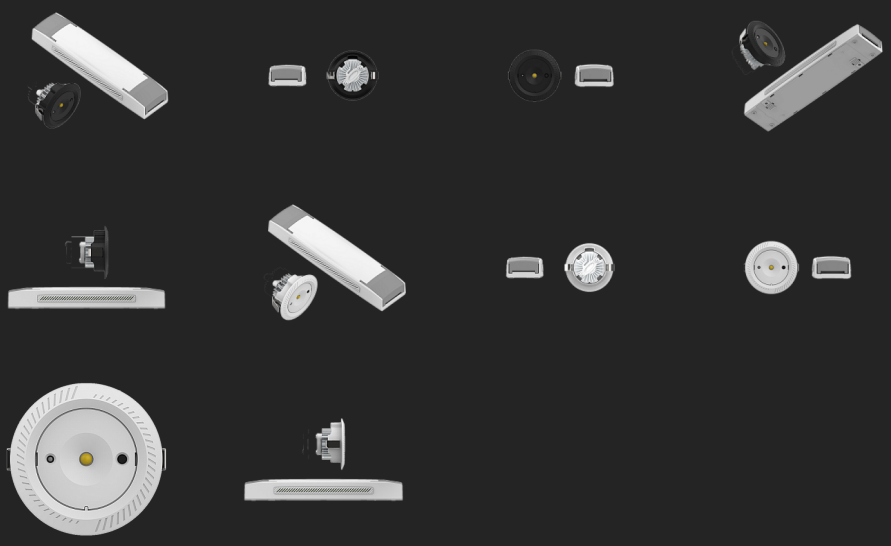


## LINE DRAWING

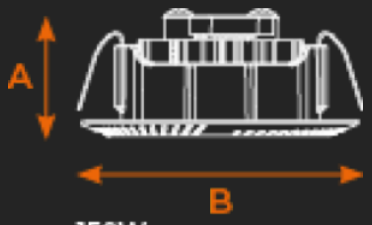


150W
A: 33mm
B: 70mm

## LDC

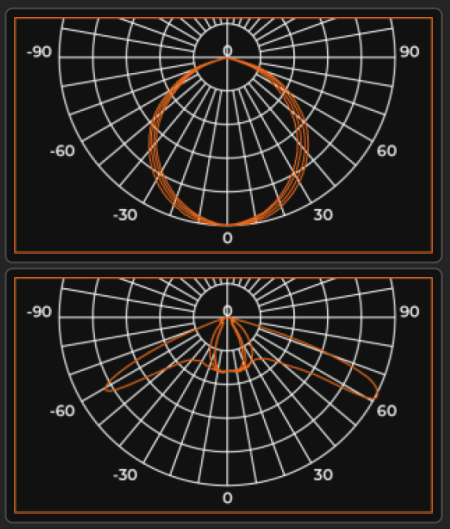


## FEATURES AND BENEFITS

- Sleek discreet dedicated non-maintained emergency downlight
- Dedicated designs for open areas and corrirdor applications
- Low profile downlight and housing for areas with limited ceiling void height
- Integrated emergency inverter and battery housing for ease of installation
- Tooless installation with pushfit terminals and ratchet close housing
- Self Test Emergency as standard with ingetral switch for manual test requirements.
- 3hrs Non-Maintained Emergency output