
:S-GL-2W/EM3/CL/B:

Gallant ST EM


IK08 IP40 50 130




5Y

Technical Summary	
Product Name	**Gallant ST EM 2W DLight Corridor Lens 6500K IP40 - Black**
Wattage (W)	**2W**
Output (lm)	**130**
CCT (K)	**6500K**
CRI	**60**
Beam Angle	**50°x140**
Colour / Finish	**Black**
IP Rating	**IP40**
IK Rating	**IK08**
Cut Out (mm)	**60**

GALLERY

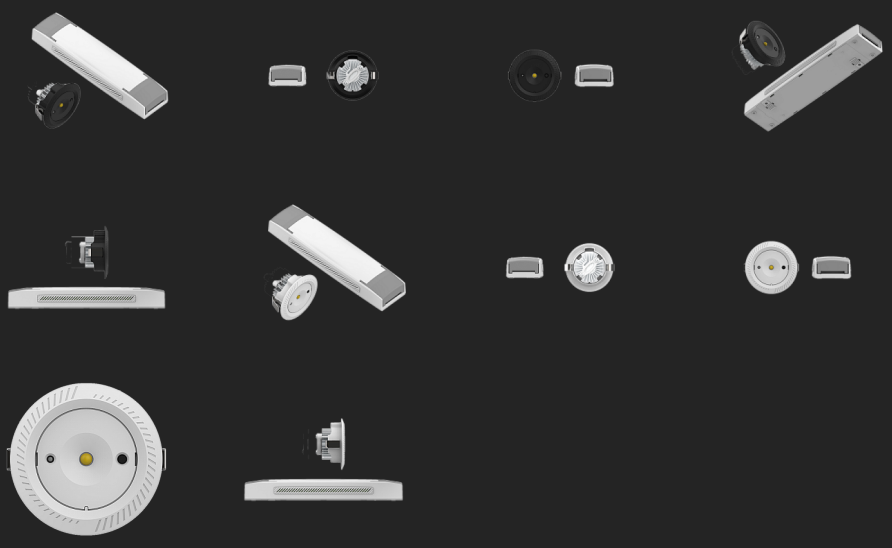


LINE DRAWING

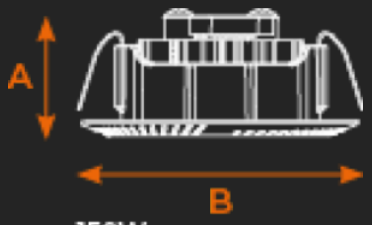

150W
A: 33mm
B: 70mm

LDC

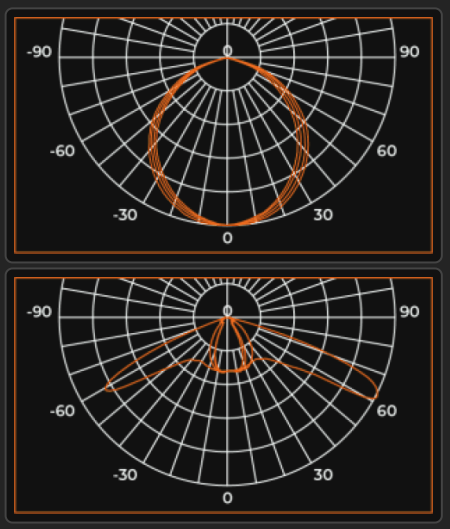

FEATURES AND BENEFITS

- Sleek discreet dedicated non-maintained emergency downlight
- Dedicated designs for open areas and corrirdor applications
- Low profile downlight and housing for areas with limited ceiling void height
- Integrated emergency inverter and battery housing for ease of installation
- Tooless installation with pushfit terminals and ratchet close housing
- Self Test Emergency as standard with ingetral switch for manual test requirements.
- 3hrs Non-Maintained Emergency output